

**REGISTRY OF PATENTS
SINGAPORE**

REC'D 25 JUN 2004

WIPO
application as filed


This is to certify that the annexed is a true copy of following application as filed with the Registry.

Date of Filing : 17 JUN 2003

Application Number : 200303719-9


Applicant(s) /
Proprietor(s) of Patent : COMPLETION PRODUCTS PTE LTD

Title of Invention : A WELL SCREEN

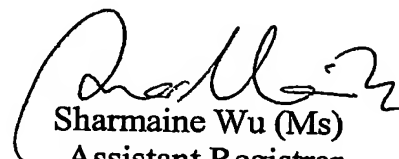

Sharmaine Wu (Ms)
Assistant Registrar
for REGISTRAR OF PATENTS
SINGAPORE

21 Jun 2004

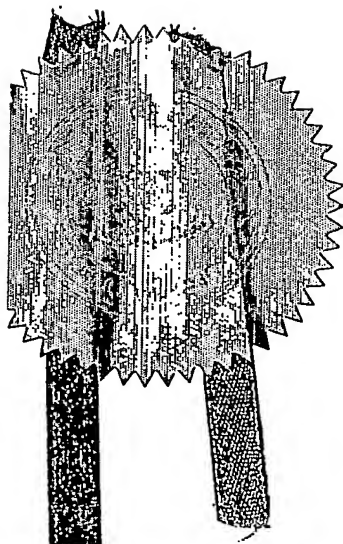

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



G00001

PATENTS FORM 1
Patents Act
(Cap. 221)
Patents Rules
Rule 19

INTELLECTUAL PROPERTY OFFICE OF SINGAPORE
REQUEST FOR THE GRANT OF A PATENT UNDER
SECTION 25



101101

* denotes mandatory fields

1. YOUR REFERENCE*

SP5686

2. TITLE OF INVENTION*

A WELL SCREEN

3. DETAILS OF APPLICANT(S)* (see note 3)

Number of applicant(s)

1

(A) Name

Completion Products Pte Ltd

Address

21 Moonstone Lane, #04-03 Poh Leng Building,
Singapore 328462

State

Country

SG

☒

For corporate applicant

☐

For individual applicant

State of incorporation

State of residency

Country of incorporation

SG

Country of residency

☐

For others (please specify in the box provided below)

(B) Name

Address

State

Country

03 JUN 17 17:07

RECEIVED
POS



ACTION

☐ For corporate applicant

☐ For individual applicant

State of incorporation

State of residency

Country of incorporation

Country of residency

☐ For others (please specify in the box provided below)

(C) Name

Address

State

Country

☐ For corporate applicant

☐ For individual applicant

State of incorporation

State of residency

Country of incorporation

Country of residency

☐ For others (please specify in the box provided below)

☐

Further applicants are to be indicated on continuation sheet 1

4. DECLARATION OF PRIORITY (see note 5)

A. Country/country designated

File number

Filing Date

DD MM YYYY

B. Country/country designated

File number

Filing Date

DD MM YYYY

☐

Further details are to be indicated on continuation sheet 6

5. INVENTOR(S)* (see note 6)

A The applicant(s) is/are the sole/joint inventor(s)

Yes

☐

No

☒

B A statement on Patents Form 8 is/will be furnished Yes ☒ No ☐

6. CLAIMING AN EARLIER FILING DATE UNDER (see note 7)

☐ section 20(3) ☐ section 26(6) ☐ section 47(4)

Patent application number

DD MM YYYY

Filing Date

Please mark with a cross in the relevant checkbox provided below
(Note. Only one checkbox may be crossed)

☐ Proceedings under rule 27(1)(a)

DD MM YYYY

Date on which the earlier application was amended

☐ Proceedings under rule 27(1)(b)

7. SECTION 14(4)(C) REQUIREMENTS (see note 8)

Invention has been displayed at an International exhibition. Yes ☐ No ☒

8. SECTION 114 REQUIREMENTS (see note 9)

The invention relates to and/or used a micro-organism deposited for the purposes of disclosure in accordance with section 114 with a depository authority under the Budapest Treaty.

Yes ☐ No ☒

9. CHECKLIST*

(A) The application consists of the following number of sheets

i.	Request	<input type="text" value="5"/>	Sheets
ii	Description	<input type="text" value="15"/>	Sheets
iii.	Claim(s)	<input type="text" value="3"/>	Sheets
iv.	Drawing(s)	<input type="text" value="5"/>	Sheets
v.	Abstract (Note: The figure of the drawing, if any, should accompany the abstract)	<input type="text" value="1"/>	Sheets
Total number of sheets		<input type="text" value="29"/>	Sheets

(B) The application as filed is accompanied by.

☐ Priority document(s)

☐ Translation of priority document(s)

☒ Statement of inventorship
& right to grant

☐ International exhibition certificate

10. DETAILS OF AGENT (see notes 10, 11 and 12)

Name

Firm

11. ADDRESS FOR SERVICE IN SINGAPORE* (see note 10)

Block/Hse No Level No. Unit No./PO Box

Street Name

Building Name

Postal Code

12. NAME, SIGNATURE AND DECLARATION (WHERE APPROPRIATE) OF APPLICANT OR AGENT* (see note 12)
(Note: Please cross the box below where appropriate.)

☒ I, the undersigned, do hereby declare that I have been duly authorised to act as representative, for the purposes of this application, on behalf of the applicant(s) named in paragraph 3 herein.

Name and Signature  LLOYD WISE

DD MM YYYY

17 06 2003

Our Ref SP5686

NOTES:

1. This form when completed, should be brought or sent to the Registry of Patents together with the rest of the application. Please note that the filing fee should be furnished within the period prescribed.
2. The relevant checkboxes as indicated in bold should be marked with a cross where applicable
3. Enter the name and address of each applicant in the spaces provided in paragraph 3.
Where the applicant is an individual
 - Names of individuals should be indicated in full and the surname or family name should be underlined.
 - The address of each individual should also be furnished in the space provided
 - The checkbox for "For individual applicant" should be marked with a cross.
Where the applicant is a body corporate
 - Bodies corporate should be designated by their corporate name and country of incorporation and, where appropriate, the state of incorporation within that country should be entered where provided.
 - The address of the body corporate should also be furnished in the space provided.
 - The checkbox for "For corporate applicant" should be marked with a cross
Where the applicant is a partnership
 - The details of all partners must be provided. The name of each partner should be indicated in full and the surname or family name should be underlined.
 - The address of each partner should also be furnished in the space provided.
 - The checkbox for "For others" should be marked with a cross and the name and address of the partnership should be indicated in the box provided.
4. In the field for "Country", please refer to the standard list of country codes made available by the Registry of Patents and enter the country code corresponding to the country in question.
5. The declaration of priority in paragraph 4 should state the date of the previous filing, the country in which it was made, and indicate the file number, if available. Where the application relied upon in an International Application or a regional patent application e.g. European patent application, one of the countries designated in that application (being one falling under section 17 of the Patents Act) should be identified and the country should be entered in the space provided.
6. Where the applicant or applicants is/are the sole inventor or the joint inventors, paragraph 5 should be completed by marking with a cross the 'YES' checkbox in the declaration (A) and the 'NO' checkbox in the alternative statement (B). Where this is not the case, the 'NO' checkbox in declaration (A) should be marked with a cross and a statement will be required to be filed on Patents Form 8.
7. When an application is made by virtue of section 20(3), 26(6) or 47(4), the appropriate section should be identified in paragraph 6 and the number of the earlier application or any patent granted thereon identified. Applicants proceeding under section 26(6) should identify which provision in rule 27 they are proceeding under. If the applicants are proceeding under rule 27(1)(a), they should also indicate the date on which the earlier application was amended.
8. Where the applicant wishes an earlier disclosure of the invention by him at an International Exhibition to be disregarded in accordance with section 14(4)(c), then the 'YES' checkbox at paragraph 7 should be marked with a cross. Otherwise, the 'NO' checkbox should be marked with a cross.
9. Where in disclosing the invention the application refers to one or more micro-organisms deposited with a depository authority under the Budapest Treaty, then the 'YES' checkbox at paragraph 8 should be marked with a cross. Otherwise, the 'NO' checkbox should be marked with a cross. Attention is also drawn to the Fourth Schedule of the Patents Rules.
10. Where an agent is appointed, the fields for "DETAILS OF AGENT" and "ADDRESS FOR SERVICE IN SINGAPORE" should be completed and they should be the same as those found in the corresponding Patents Form 41. In the event where no agent is appointed, the field for "ADDRESS FOR SERVICE IN SINGAPORE" should be completed, leaving the field for "DETAILS OF AGENT" blank.
11. In the event where an individual is appointed as an agent, the sub-field "Name" under "DETAILS OF AGENT" must be completed by entering the full name of the individual. The sub-field "Firm" may be left blank. In the event where a partnership/body corporate is appointed as an agent, the sub-field "Firm" under "DETAILS OF AGENT" must be completed by entering the name of the partnership/body corporate. The sub-field "Name" may be left blank.
12. Attention is drawn to sections 104 and 105 of the Patents Act, rules 80 and 105 of the Patents Rules, and the Patents (Patent Agents) Rules 2001.
13. Applicants resident in Singapore are reminded that if the Registry of Patents considers that an application contains information the publication of which might be prejudicial to the defence of Singapore or the safety of the public, it may prohibit or restrict its publication or communication. Any person resident in Singapore and wishing to apply for patent protection in other countries must first obtain permission from the Singapore Registry of Patents unless they have already applied for a patent for the same invention in Singapore. In the latter case, no application should be made overseas until at least 2 months after the application has been filed in Singapore, and unless no directions had been issued under section 33 by the Registrar or such directions have been revoked. Attention is drawn to sections 33 and 34 of the Patents Act.
14. If the space provided in the patents form is not enough, the additional information should be entered in the relevant continuation sheet. Please note that the continuation sheets need not be filed with the Registry of Patents if they are not used.



G00002

1

A WELL SCREEN

Field of the invention



159159

- 5 The present invention relates to a well screen for filtering fluids drawn from wells, and to a method of its manufacture.

Background of invention

- 10 The extraction of fluids such as oil, gas or water from subterranean wells involves introducing a transportation pipe into the ground. The fluid is forced to the surface of the earth through the pipe by natural pressure in the well, a pump aboveground, or displacing the fluid with another fluid, such as using water to displace oil. Such a process involves a flow of highly pressurised fluid into the
- 15 pipe which inevitably carries along with it debris in the form of sand, stones and other particles, which erodes the welling machinery. Therefore, it is a common practice to provide a filter assembly, known as a well screen, at the submerged opening of the transportation pipe to separate the fluid from the solids.
- 20 An available design of well screen, comprises firstly a length of perforated pipe known as a base pipe. The transportation pipe is connected at its submerged end to the base pipe. The perforations along the side of the base pipe allow the fluid to enter into the transportation pipe. Generally, it is desirable that the base

pipe has as large a diameter as possible, subject to physical and efficiency constraints.

5 The base pipe is essentially encased in an outer layer of screen, which filters the fluid flowing into the base pipe. The layer of filter medium has fine openings, and therefore a large percentage of open area. Some types of filter medium are easily damaged as they are woven of fine metal threads, which are eroded by the particles carried by the strong fluid flow. They are also easily clogged, creating localised areas of blockage which eventually build up.

10

Conventionally, the filter medium is wrapped tightly around the base pipe.

However, it is also proposed in the art to provide a gap between the base pipe and the filter medium, as shown in US 2002/0038707 to allow the fluid to flow past clogged areas on the filter medium and enter through unclogged adjacent

15

areas.

Many inventions have been proposed to improve the efficiency and life spans of well screens. For example, US 5,611,399 is concerned with fabricating a filter
20 assembly without using welds on the filter material, since such welded seams can create areas of weakness. A base pipe with openings is disclosed, upon which is mounted a coarse screen having a series of longitudinally extending support members tied together with a wound wire which can be a series of rings. On the coarse screen is disposed a fine screen which is held by

crimping. A perforated outer shroud covers the fine screen as a protective screen. The screens are put through a die in order to compress and hold these elements onto end caps.

- 5 US 6,305,468 provides an improvement on US 5,611,399 and is also concerned with fabricating a filter assembly without using welds on the filter material which can create areas of weakness. The method of securing the filter material is different from US 5,611,399 and the outer shroud is also put through the die with the claimed advantage of the latter design being that the close-fit nature of
- 10 the components, particularly the outer shroud and the filter material, allows the assembly to withstand significantly greater differential pressure than the constructions of prior designs such as illustrated in US Patent No. 5,611,399.

- US 6,158,507 discloses a rod-base screen with two filter layers and an outer
- 15 shroud 34. The method of preparing the rod-based screen is disclosed in US 4,314,129.

- US 4,314,129, uses a resistance welding technique to secure a spirally wound rod along a circumferential spread of longitudinal rods, the longitudinal rods
- 20 running parallel along the length of the base pipe.

US Application 2002/0038707 noted above further describes a spirally-wrapped wire used to create a space between the filter and the base pipe, such that the gap between the filter medium and the base pipe is maintained. This gap

prevents blockage on the surface of the base pipe in the event that the filter medium were pressed towards the base pipe.

US 5,782,299 and US 6,109,349 disclose a filter layer and a protective screen, which can be disposed inside or outside the filter. The protective screens are, in turn, made up of two layers of perforated stainless steel joined together. The layers are relatively thin (.02-.13 inch) and thus, relatively speaking, have little structural rigidity. The perforations of the two layers are mis-aligned in such a way that the fluid entering into the filter assembly cannot flow in a direct flow path, and therefore the pressure of the impingement of particles and fluid onto the fine filter mesh is reduced. The deflection is meant to reduce the direct impingement of the fluid against the filter medium.

US 5,849,188 discloses a perforated pipe having an inner jacket closely wound on the pipe, a woven wire mesh layer and a protective jacket. The woven mesh layer is of a type known as twilled Dutch weave which, it is claimed, allows the mesh to remain relatively unclogged even when particles accumulate on the surface of the mesh.

20 Summary of the invention

The present invention aims to provide an improved well screen and/or provide the general public with a useful choice.

In general terms, the invention discloses a well screen which can withstand the collapse of an outer protective screen, in that a gap between a filter medium and the protective screen is maintained by an outer standoff layer. The gap ensures the existence of flow paths across the surface of the filter medium, as well as flow paths through the filter medium. The invention also proposes the use of a pre-welded mesh which could be wrapped around a base pipe before being secured in place. The invention also proposes the use of a series resistance welding technique, wherein the electrodes are placed next to each other on the same surface to be welded, instead of on opposite sides. This technique makes welding the sides of a flat sheet to form a cylinder possible without the difficulty of positioning one electrode within the cylinder and one without.

According to the invention in a first aspect, there is provided a well screen comprising a filter layer; an outer stand-off layer around the filter layer; and a cover around the outer stand-off layer; wherein the outer stand-off layer is arranged to space the cover from the filter layer and resist collapse of the cover towards the filter layer.

According to the invention in a second aspect, there is provided a method of forming a standoff layer in a well screen comprising the steps of providing a pre-fabricated mesh, wrapping the mesh around at least one underlying member of the well screen and connecting together the longitudinal edges of the mesh.

According to the invention in a third aspect, there is provided a method of forming a filter layer for a well screen comprising the steps of forming a sheet of woven mesh into a hollow cylindrical form and connecting longitudinal edges of the sheet together by resistance welding.

5

According to the invention in a fourth aspect, there is provided a well screen comprising a base pipe; an inner stand-off layer; a filter layer covering the inner stand-off layer; an outer stand-off layer around the filter layer; and a cover around the outer stand-off layer.

10

According to the invention in a fifth aspect, there is provided a well screen comprising: a filter layer; an outer stand-off layer which provides a cage for and/or is of greater rigidity than the filter layer; and a cover around the outer stand-off layer.

15

Brief description of the figures

Preferred features of the invention will now be described, for the sake of illustration only, with reference to the following figures in which:

20

Fig 1, illustrates a cut-away sectional perspective view of a well screen according to one embodiment of the invention.

Fig 2 illustrates an embodiment of the invention which is a method of welding a filter mesh of the well screen as shown in Fig 1 using a series resistance welding technique.

5 Fig 3 illustrates the method of Fig 2 viewed from the longitudinal side of the well screen.

Fig 4 illustrates a method of welding the ends of two filter meshes of Fig 2 and 3 together.

10

Fig 5 illustrates the method of Fig 3 viewed from the longitudinal side of the well screen.

Detailed description of the embodiments

15

Fig 1 shows one end of a well screen 10 according to an embodiment of the invention, comprising a base pipe 11, a cylinder of mesh being an inner standoff layer 12, a cylinder of mesh being a filter medium 13, a cylinder of mesh being an outer standoff layer 14, a cylinder of perforated metal sheet being a protective cover 15 and a weld ring 16. Only one end of the well screen is
20 illustrated in Fig 1, the other end of the well screen 10 being the same as what is shown.

The base pipe 11 has holes 111 through which fluid may flow into an axially disposed transportation pipe (not shown). The holes 111 make up a total open area of 15 to 30% on the side of pipe 11. Industrial standards usually specify that it's the pipe has an outer diameter of 2.375" to 7".

5

The inner standoff layer 12 is preferably made up of mesh of orthogonally disposed metal rods welded together. The mesh is pre-formed as a flat sheet and is cut to size and wrapped and pulled tightly around the base pipe 11, typically using a series of strap wrenches having straps of flexible material with a tightening mechanism, which can be wrapped around the mesh and then tightened, pulling the mesh tightly around the base pipe. The two longitudinal sides of the mesh sheet are then welded to each other to form a cylindrical mesh 12 tightly embracing the base pipe 11. The mesh 12 therefore provides a rigid skeletal structure, which ensures a consistent gap between a filter medium 13 and the outer diameter 112 of the base pipe 11. The gap enhances flow distribution through the filter medium 13. The welding technique used is preferably series resistance welding.

The filter medium 13 comprises typically two sub-layers of wire mesh (not illustrated) which are sintered together to form a strong single bonded layer providing fine filtration functions. Each sub-layer of the wire mesh is a commercially available material. The material used could be a stainless steel such as Grade 316 or Alloy 20. The quality of these meshes is controlled by several international standards, for example, "plain square weave", "plain Dutch

weave", "twill Dutch weave" and so on. The filter medium layer 13 is formed into a cylinder from a flat sheet of filter medium before being pulled over the base pipe 11 and the inner standoff layer 12.

- 5 The specification of the outer sub-layer (i.e. the size of the openings between the wires) is determined based on the expected size distribution of particles contained in the well. Due to the fine wire size and the large openings required (around 80 – 300 microns), this outer sub-layer is relatively delicate given the stress it has to withstand in a pressurised well. Hence, a common technique to
- 10 improve the strength of the outer sub-layer is to provide a mechanical support by sintering one or more sub-layer of mesh underneath. The inner sub-layer of woven mesh is constructed from wires with a larger diameter and with larger apertures or openings between the weaves. The two sub-layers are sintered together by compressing them together at a certain pressure and raising the
- 15 temperature to just below melting point. The resultant sintered filter medium 13 has both the filtering property of the outer sub-layer of mesh and strength provided by the combination of the two sub-layers. The sintered filter medium 13 is then rolled into a cylinder, typically 1200mm long. The overlapping sides are resistance welded together to form a longitudinal seam.

20

The resistance welding technique employed in this embodiment is preferably *series* resistance welding, which addresses the problem of electrode positioning within a cylindrical structure. Successful application of resistance welding

provides significant cost savings and consistent weld quality, as compared to other welding and joining techniques.

When it is desired that two or more cylindrical filter medium 13 are joined together to form a single longer filter medium 13, filter medium 13 cylinders are joined circumferentially end-to-end by the same series resistance welding technique.

The outer standoff layer 14 is preferably more rigid than the filter medium 13 either by choice of material, structure or both, and is preferably constructed from a mesh formed from orthogonally disposed rods welded together. The outer standoff layer 14 ensures an adequate distance, preferably 2.5 to 3mm, between the filter medium 13 and the protective cover 15, thus enhancing the flow distribution through the filter medium 13. The outer standoff layer is firstly pulled tight around the filter medium 13 (including, naturally, all the layers beneath the filter medium 13) by strap wrenches as described below with regard to the inner standoff layer. If the mesh is metallic, the two adjoining axial edges of the outer standoff layer 14 are resistance welded together along their longitudinal joints and circumferential joints to form a rigid skeletal structure. The skeletal structure prevents direct contact between the protective cover 15 and the filter layer 13. In the event that the protective cover 15 collapses or is deformed due to the force of pressurised fluid flow or collisions with the bore wall of the well during the lowering of the well screen, the gap between the protective screen 15 and the filter medium 13 would be maintained by the outer

standoff layer 14. In this way, disturbance to the flow characteristic across the filter medium is minimised, by retaining unobstructed flow paths through the filter medium 13, which would have otherwise been blocked by contact between the protective screen 15 and the filter medium 12. The outer standoff layer 14

5 also provides greater mechanical strength in a well screen compared to the prior art, and specifically provides comparatively high resistance to rises in back pressure and thus provides high burst strength since layer 14 forms a welded "cage" enclosing the filter medium to hold the filter medium firmly around the inner standoff layer 12 and base pipe 11.

10

The protective cover 15 of the first embodiment, which is typically made by welding a flat sheet into a tube in a spiral manner, is slid over the outer standoff layer 14. Generally, it has perforations of $\frac{1}{4}$ " to $\frac{1}{2}$ " in diameter 151 which provides adequate open area of 15% to 30% through which fluid may flow.

15

The weld ring 16 is used to join the inner standoff layer 12, filter medium 13, outer standoff layer 14 and the protective cover 15 to the base pipe 11.

Therefore the ends of all the layers are sealed, such that fluid entering into base pipe 11 must flow through all the layers and not around the ends. There are

20 weld rings 16 on both ends of a well screen 10 and these are welded to the well screen components. It is possible that there are more than one well screen along a long base pipe, in which case each well screen will still have two weld rings.

Fig 2 shows a side view of a type of resistance welding process, known as series resistance welding, which is used to weld the layers of the well screen into cylindrical shapes if the material is metallic. For example, the flat sheet forming the filter medium 13 is first rolled into a cylinder and placed into a seam welding fixture, with sides of the filter medium sheet along the length of the cylinder overlapping in a region 24. The amount of overlap, a process variable, is approximately 5mm. The seam is supported by a support member 23 against which the electrodes 21 press. The support member 23 may be sized such that its diameter is less than or equal to the inner diameter of the cylindrical shaped product. The support member 23 may be made of any material such as polymer or metal, but typically copper.

Instead of having electrodes placed on the opposite sides of the overlap 24 (as in a typical resistance welding process) the electrodes 21 (which are made up of electrodes 31a, 31b as seen in Fig 3) are placed side by side, but without contact so as to prevent a short circuit.

Fig 3 illustrates the series resistance welding process viewed from the longitudinal side of the filter mesh 13. The current flows from one electrode 31a in contact with the external flap of the overlapping mesh material 24, through the mesh material, and into the other electrode 31b which is also in contact with the same external flap of the overlap 24. A support member 23 underneath the overlap 24 allows pressing of the electrodes against the overlap 24. Typically, the series resistance welding welds a length of 4mm each time. The longitudinal

seam of the filter medium 322 cylinder is formed by repetitions of series resistance welding of spots on the overlap 24, along the entire length of the cylindrical mesh filter 22. The seam is largely flattened by pressure applied during the welding.

5

A cylinder of filter medium 12 is usually 4' long. If a longer length is required, several cylinders may be join end-to-end, by arranging the cylinders end-to-end into a long cylinder, and resistance welding them together. Fig 4 illustrates how two filter medium may be joined together, viewed from length-wise. Two cylinders of filter mesh 42a 42b are swaged one into the other, forming an overlap 42c. The electrodes 21 press onto the overlap 42c of the two cylinders, against an internal support member 23. Referring to Fig 5, a cross-sectional view illustrates how the two layers of filter mesh 42a 42b are supported from within the cylinders by support member 23, and the electrodes 21 pressing on the layers 42a 42b when conducting a current through the overlapping layers 42c.

10
15

A long cylinder of several cylinders of welded mesh is eventually formed, and the two ends of the combined cylinder are joined to the weld rings, also by welding.

20

Although the embodiment provides for a well screen which is made up of parts as described in the Figures, other embodiments are envisaged. For example, instead of a metal mesh forming the outer standoff layer 14, it can be another

material which provides sustainable a gap between the protective cover 15 and the filter medium 13, such as a strong polymer, which may be wrapped around the pipe in a similar way to that described and secured by any suitable means such as adhesive. Instead of a flat welded mesh, other structures may be employed which maintain a gap between the protective cover and the filter medium. For example, two sheets having a plurality of openings, the sheets sandwiching a plurality of spacing pillars, or a single sheet having a plurality of radial projections disposed between openings may be employed, in both cases the pillars/projections being disposed on connected islands between the openings of each sheet. Alternatively, parallel rods spread around the circumference of the filter medium and welded along the length of the filter medium 13, or a series of rings spread and tightened over (or welded to) the filter medium 13, or a thick metal thread running helically and tightly around the circumference and along the length of filter medium, or an embossed contoured and perforated layer may be employed.

A second purpose of the outer standoff layer is to provide a strong structural support to the filter medium 13 in the event of back pressure pushing from the inside of the base pipe outwards against the filter medium. This ensures that the filter medium of the present invention has a longer life span compared to filter medium in conventional well screens.

The application of a resistance welding technique in well screen manufacture that maintains the integrity of the mesh and provides for more consistent seams

in the cylindrical layers than those formed by welding techniques usually employed in well screen manufacture, such as TIG welding which tend to damage the mesh and leave weak points where tearing may result under the shearing flow in an oil well.

5

Although the well screens according to the invention are principally intended for use in oil wells, the well screens are applicable to wells of other fluids, such as natural gas and water etc.

10

Claims

1. A well screen comprising:
a filter layer;
5 an outer stand-off layer around the filter layer; and
a cover around the outer stand-off layer; wherein
the outer stand-off layer is arranged to space the cover from the filter layer and
resist collapse of the cover towards the filter layer.
- 10 2. A well screen of claim 1 wherein the outer standoff layer is a skeletal mesh.
3. A well screen of claim 1 further comprising an inner standoff layer covered by
the filter layer.
- 15 4. A well screen of claim 3 wherein the inner standoff layer is a skeletal mesh.
5. A well screen comprising:
a filter layer;
a skeletal layer around the filter layer; and
20 a cover around the skeletal layer; wherein
the skeletal layer is arranged to space the cover from the filter layer.
6. A method of forming a standoff layer in a well screen comprising the steps of:

providing a pre-fabricated mesh;
wrapping the mesh around at least one underlying member of the well screen; and
connecting together the longitudinal edges of the mesh.

5

7. A method claim 6 wherein the standoff layer is enclosed by a filter layer.

8. A method claim 6 wherein the standoff layer encloses a filter layer.

10 9. A method of forming a filter layer for a well screen comprising the steps of forming a sheet of woven mesh into a hollow cylindrical form; and connecting longitudinal edges of the sheet together by resistance welding.

15 10. A method according to claim 8 wherein the resistance welding comprises the steps of applying resistance welding electrodes to the same surface of the mesh.

11. A well screen comprising:

20 a base pipe;
an inner standoff layer;
a filter layer covering the inner standoff layer;
an outer standoff layer around the filter layer; and
a cover around the outer standoff layer.

12. A well screen comprising:

a filter layer;

an outer stand-off layer which provides a cage for and/or is of greater

5 rigidity than the filter layer; and

a cover around the outer stand-off layer.

AbstractA Well Screen

- 5 A well screen is proposed having an outer standoff layer between the protective screen and the filter medium. A method of making the well screen is also proposed, comprising a step of pulling an open-ended cylinder of filter medium over underlying layers in the well screen. Furthermore, a method is proposed using series resistance welding for sealing seams in the layers making up the
- 10 well screen.



162162

Fig 1



G00002



163163

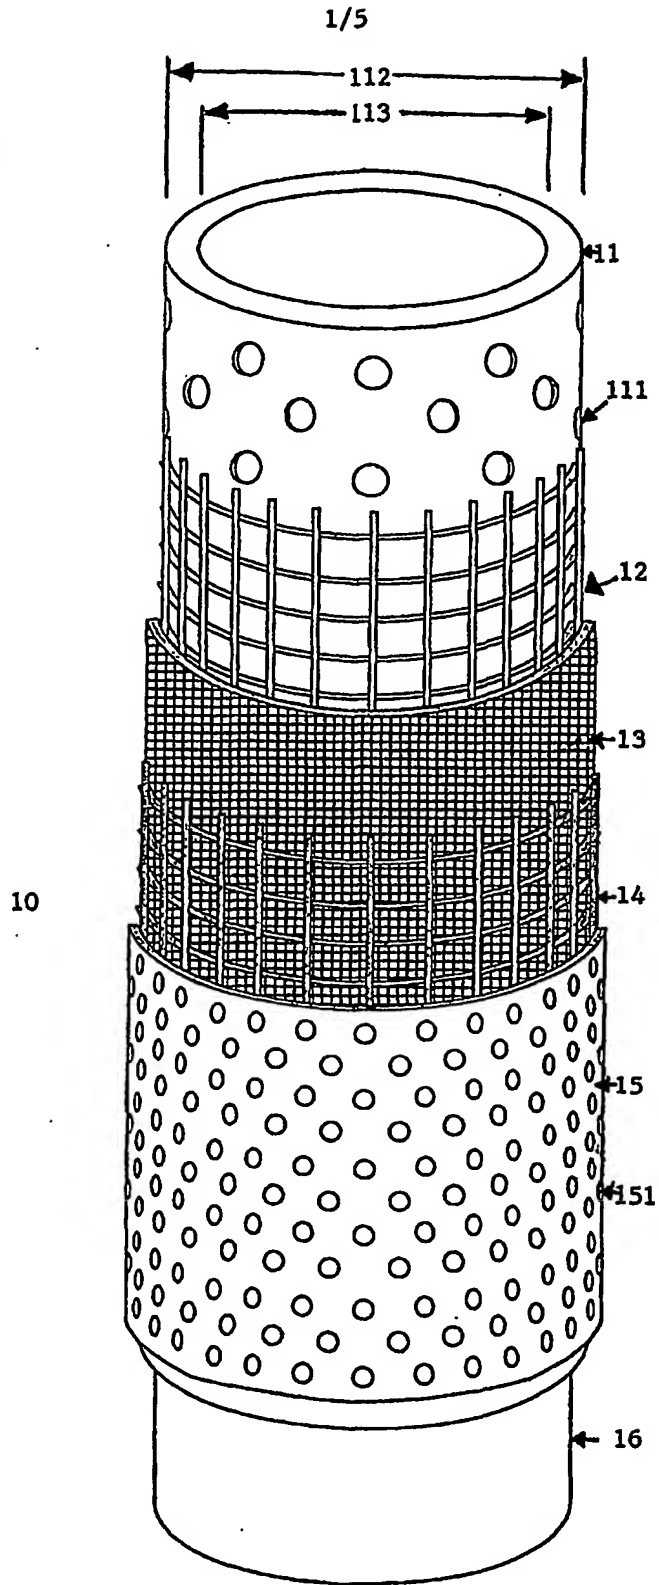


Fig 1

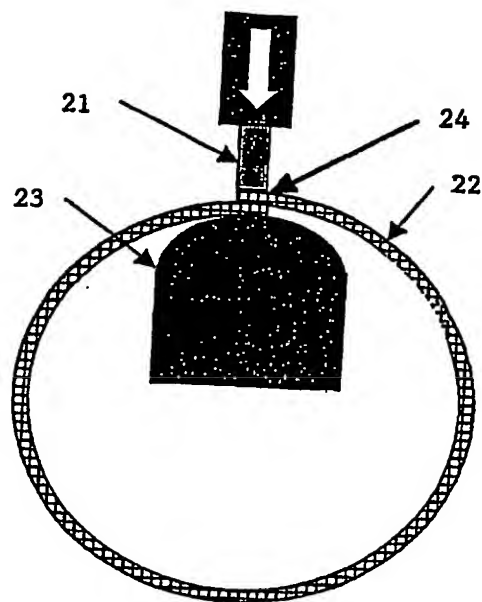


Fig 2

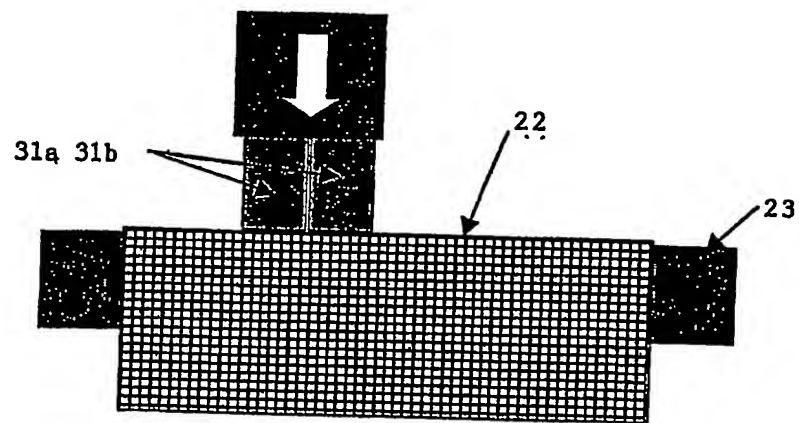


Fig 3

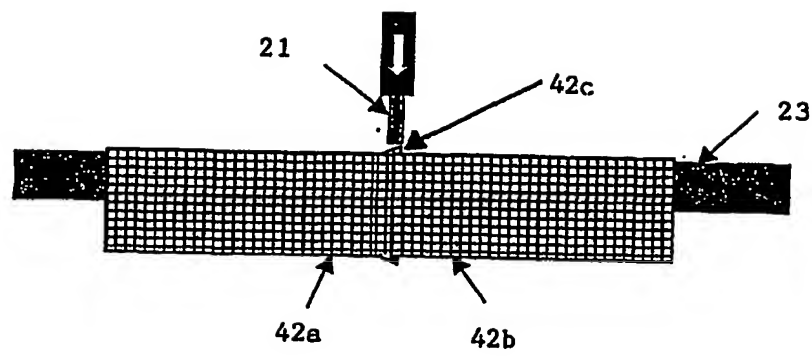


Fig 4

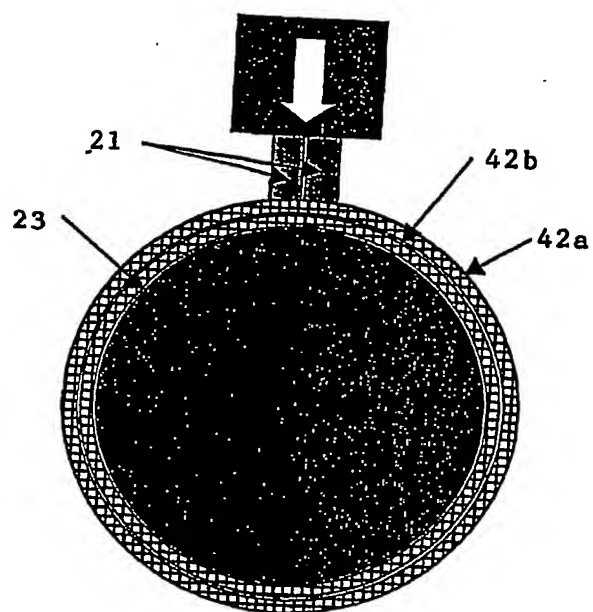


Fig 5